



TECHNICAL INFORMATION

APPLICATION	Location	Exterior plenum box
		Removable by hand
CONSTRUCTION	Shape	Round
	Volume control	Galvanised steel damper (optional)
	Min. diameter	125 mm
	Max. diameter	250 mm
	Height	57,5 mm -> 77,5 mm
MATERIAL	Standard material	Injection moulded PP,TPE
	Standard finishing	RAL9005
MOUNTING	Mounting options	Nothed connection
PERFORMANCE	Certification	EN 15727:2010, Class D

DRAWING

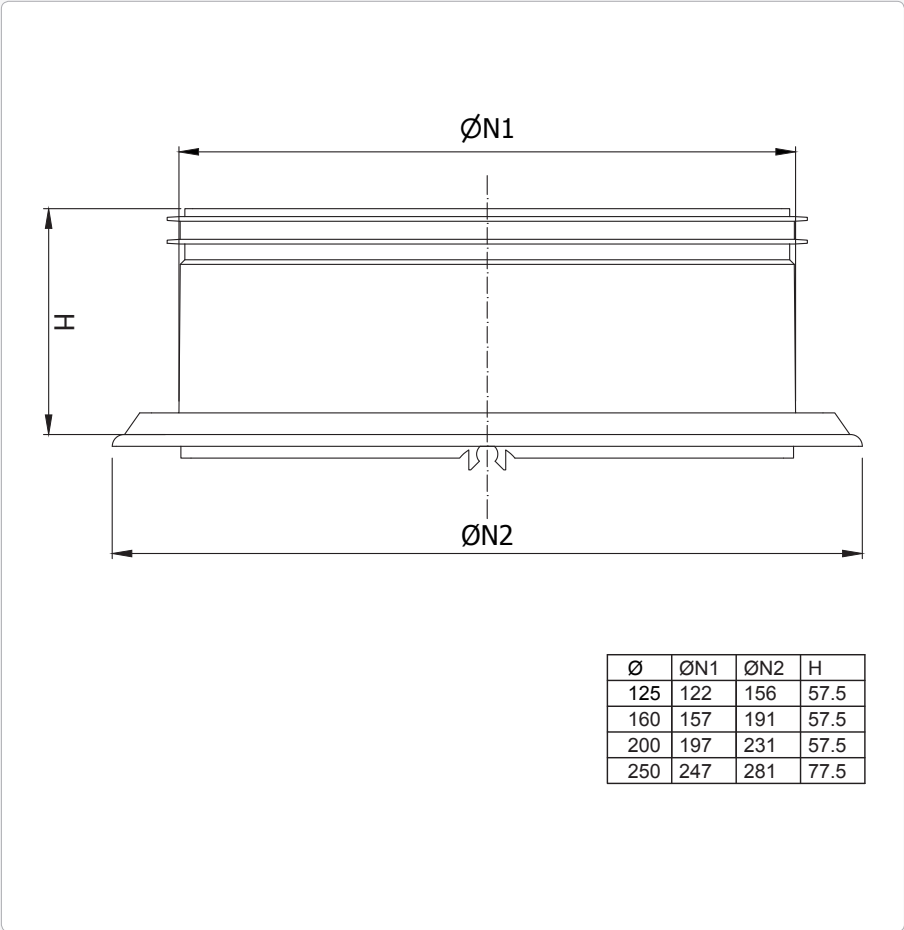

XPS324
AIRTIGHT SPIGOT



This airtight spigot increases quality and ease of mounting for most types plenum boxes. All spigots type 125, 160 mm, 200 mm, and 250 mm are available in class D according to EN15727 as standard The entire spigot can simply be taken off to save on transport costs or to help you during installation. This design will also allow a quick removal of the optional damper.