# V-061

#### AIR VALVES





#### **VARIANTS**

VA061, VT061

The disc valve V-061 is suitable for supply (VT061) and for exhaust (VA061) in residential ventilation systems. Supplied with mounting ring, suitable for connection with flexible or rigid ductwork. For duct cleaning purposes the valve is easily removable by the handy quarter turn connection. Volume adjustment by screwing air deflection cone in or out. Execution in steel, standard finish painted white (RAL9010).

## Easily removable by quarter turn connection

Volume control by manipulation of air deflection cone











#### **TECHNICAL INFORMATION**

APPLICATION	Туре	VA061 Exhaust VT061 Supply	
	Airflow direction	Horizontal, radial	
CONSTRUCTION	Shape	Round	
	Frontplate	Internal air deflection cone on a central lead screw	
	Available nominal sizes	Ø100, 125, 160, 200mm	
MATERIAL	Standard material	Steel	
	Standard finishing	Powder coating RAL9010/RAL9016	
	Mounting ring	Galvanised steel, unpainted	
MOUNTING	Mounting options	Mounting ring with quarter turn connection	

## **QUICK SELECTION**


Exhaust Qv [m³/h]	VA061 - Ø [mm]			
L <sub>w</sub>	100	125	160	200
25 dB(A)	37	112	150	172
35 dB(A)	71	188	278	333

Supply Qv [m³/h]	VT061 - Ø [mm]			
L <sub>w</sub>	100	125	160	200
25 dB(A)	47	93	117	173
35 dB(A)	106	179	200	349


# **PRODUCT KEY**



VA061 V-061

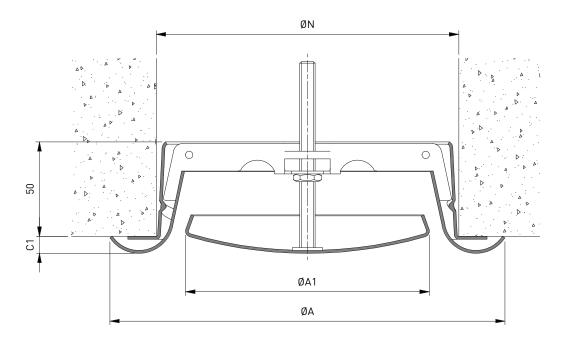

# VT061

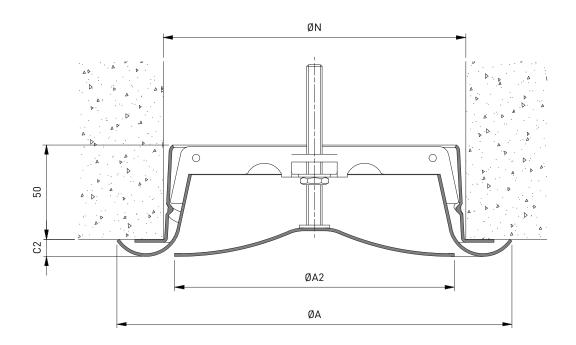

# **DIMENSIONS**

ØN	ØA	ØA1	ØA2	C1	C2
100	140	75	91	8	8
125	166	98	112	8	8
160	209	129	148	9	9
200	248	157	196	13	11

All dimensions in mm

