

# CB400

## ALUMINIUM ROUND GRILLE WITH BARS



ROUND



WALL



1 WAY THROW



SUPPLY



EXHAUST



### VARIANTS

CB400, CB420

Circular grille with straight bars or with bars 15° deflection and removable core, for mounting directly on a circular duct or with screw fixing to the wall. Execution in aluminium, standard satin anodised finish.

Architectural finish

Fixed bars, center distance between bars 12,5mm

Removable core

### TECHNICAL INFORMATION

APPLICATION	Type	Supply or exhaust
	Direction	Horizontal, fixed bars
CONSTRUCTION	Center distance between bars	12,5mm
	Thickness of frame	25mm
	Available diameters	100, 125, 160mm
	Installation depth	52mm
MATERIAL	Standard material	Core: anodized aluminium Housing: mill finish aluminium
	Standard finishing	Satin anodized 11µm
	Product finishing options	Powder coating RAL of choice
MOUNTING	Mounting options	Concealed screw fixing

### QUICK SELECTION

ØN [mm]	L <sub>w</sub>	Supply Q <sub>v</sub> [m³/h]	Exhaust Q <sub>v</sub> [m³/h]
100	25 dB(A)	64	66
	35 dB(A)	87	87
125	25 dB(A)	80	80
	35 dB(A)	124	120
160	25 dB(A)	114	120
	35 dB(A)	185	168

PRODUCT KEY


C	B	4	0	0	-	-	1	2	5
---	---	---	---	---	---	---	---	---	---

Nominal diameter N (mm):  
100, 125, 160

-: Naturel anodised  
F: Coated

0: Deflection 0°  
2: Deflection 15°

CB400

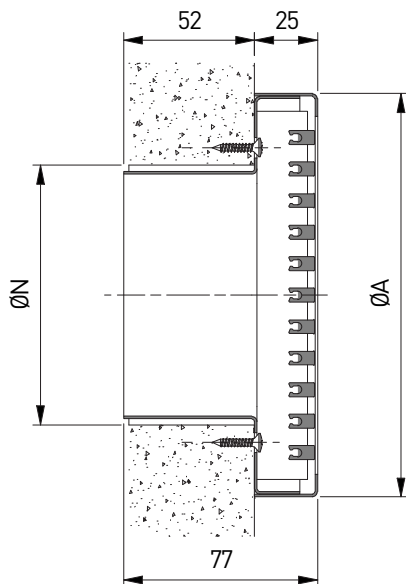

DIMENSIONS

ØN	ØA
100	160
125	160
160	200

All dimensions in mm

CB420

