

WGD

ROUND PERFORATED STEEL WALL GRILLE WITH FRICTION SPRINGS



VARIANTS

WGD

Perforated grille as an aesthetic alternative to a standard residential air valve. Equipped with friction springs to install in spiral duct or directly in the wall.

Aesthetic residential air valve

With friction springs



ROUND



WALL



1 WAY THROW



SUPPLY



EXHAUST

TECHNICAL INFORMATION

APPLICATION	Type	Supply or exhaust
	Direction	One direction, not adjustable
CONSTRUCTION	Frontplate	Perforations Ø4mm, 37% free passage
	Available diameters	125mm
	Installation depth	52mm
MATERIAL	Standard material	Painted steel
	Standard finishing	Powder coating RAL9010
	Product finishing options	Powder coating RAL of choice
	Volume control	Galvanised volume control disk, manual operation
MOUNTING	Mounting options	Friction springs

QUICK SELECTION

Supply Q _v [m³/h]			
ØN [mm]	L _w	damper 100% open	damper 100% closed
125	25 dB(A)	58	20
	35 dB(A)	81	32

Exhaust Q _v [m³/h]			
ØN [mm]	L _w	damper 100% open	damper 100% closed
125	25 dB(A)	57	40
	35 dB(A)	79	55


PRODUCT KEY

W	G	D	-	F	1	2	5
---	---	---	---	---	---	---	---

Nominal diameter N (mm):
125

F: Coated

WGD

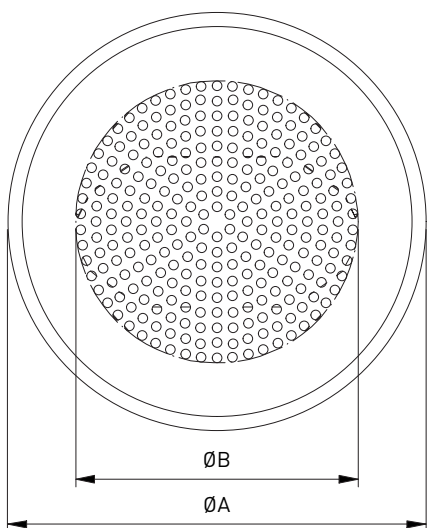

DIMENSIONS

ØN	ØB	ØA
125	112	165

All dimensions in mm

