

WGC

ROUND PERFORATED STEEL WALL GRILLE WITH FRICTION SPRINGS



ROUND



WALL



1 WAY THROW



SUPPLY



EXHAUST



VARIANTS

WGC

Perforated grille as an aesthetic alternative to a standard residential air valve. Equipped with friction springs to install in spiral duct or directly in the wall.

Aesthetic residential air valve

With friction springs

TECHNICAL INFORMATION

APPLICATION	Type	Supply or exhaust
	Direction	One direction, not adjustable
CONSTRUCTION	Frontplate	Perforations Ø4mm, 37% free passage
	Available diameters	125mm
	Installation depth	36mm
MATERIAL	Standard material	Painted steel
	Standard finishing	Powder coating RAL9010
	Product finishing options	Powder coating RAL of choice
MOUNTING	Mounting options	Friction springs

QUICK SELECTION


Supply Q_v [m³/h]		
ØN [mm]	L_w	
125	25 dB(A)	101
	35 dB(A)	133

Exhaust Q_v [m³/h]		
ØN [mm]	L_w	
125	25 dB(A)	80
	35 dB(A)	121

PRODUCT KEY

W	G	C	-	F	1	2	5
				Nominal diameter N (mm): 125			
				F: Coated			

WGC

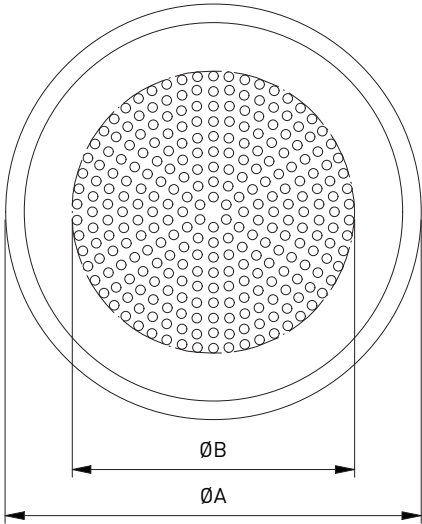

DIMENSIONS

ØN	ØB	ØA
125	112	165

All dimensions in mm

